

38 Ton Universal Fixed Height Tripod Jack

Model 8882



The Model 8882 Fixed Height Tripod Jack is a 38 ton capacity, two stage hydraulic jack designed primarily for use in aircraft maintenance. It consists of a tripod structure, hydraulic cylinder assembly, reservoir, valve block assembly, hand pump assembly, tow handle, adjustable swivel feet and swivel casters.

The jack leg pads are raised off the ground by spring loaded casters. The casters will retract and the pads rest on the ground when a load is applied to the jack.

Model 8882 is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

Standard Features:



- Manual hand pump with high, medium and low pressure operating positions
- Heavy duty tow handle and swivel casters with swivel locks for improved towing
- Adjustable swivel feet with level for leveling jack
- Hydraulic "Thermal" relief valve for added protection and safety in the event of internal fluid expansion due to temperature
- Secondary cylinder seal for protection against contaminants and to prolong life of primary seal
- Rain hat (covers jack upper head)
- Hard chrome plated cylinder bore
- All unpainted parts are plated to resist corrosion
- Skydrol resistant paint (safety yellow)
- Factory proof load @ 150% of rated capacity
- Three year standard warranty
- Shipment on domestic skid

Optional Features:

- Air operated hydraulic pump
- Load gauge for load indication (reads tons/psig)
- Hydraulic operated casters provide ease in jack leveling and increased ground clearance for towing
- Ladder/platform
- Export crating
- Customer specified paint color

38 Ton Universal Fixed Height Tripod Jack

Model 8882

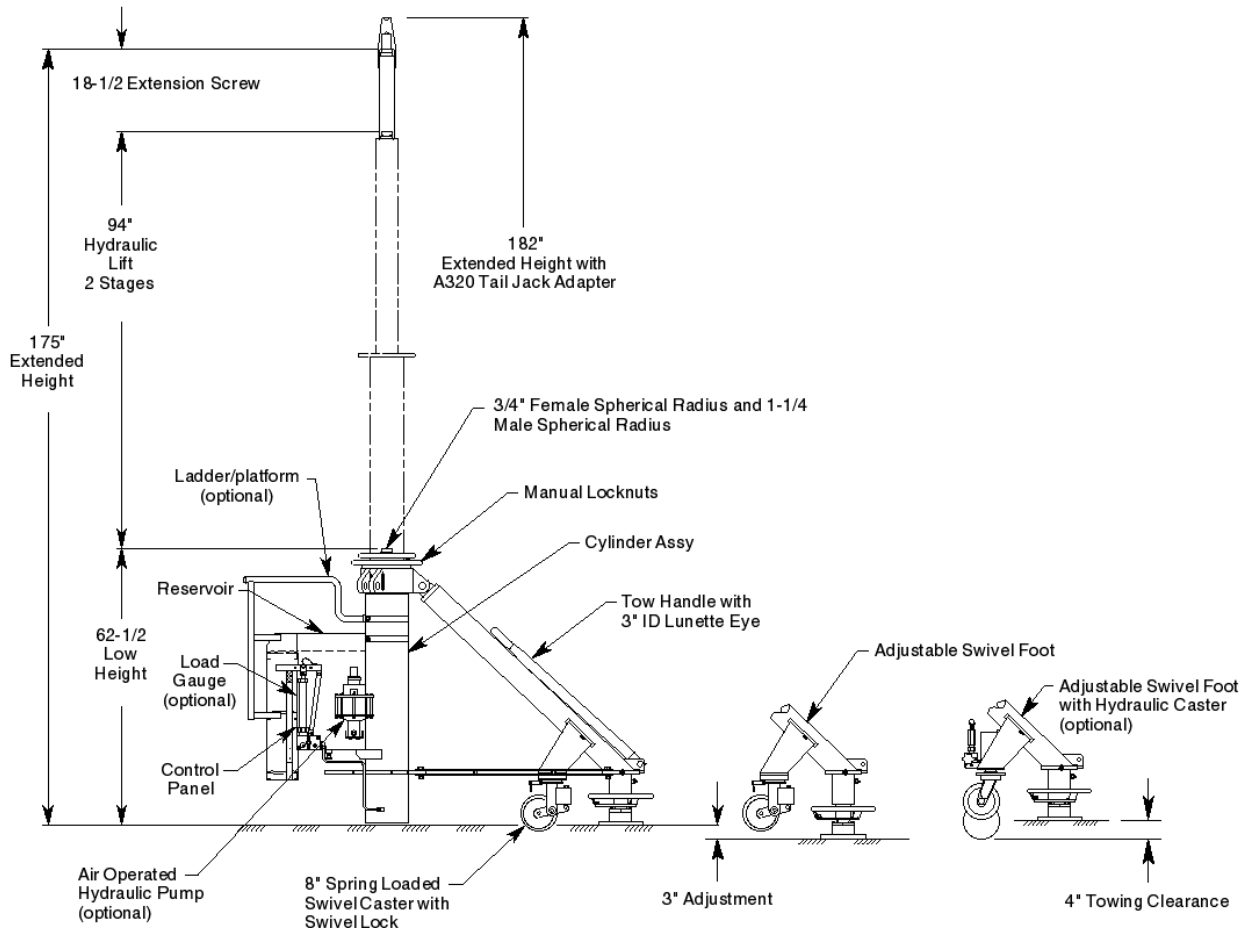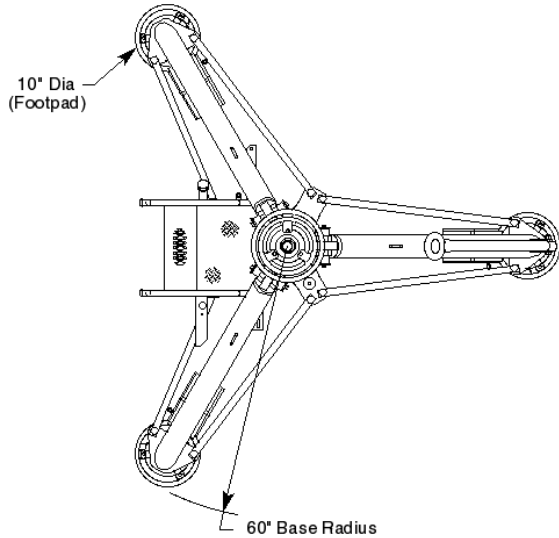

For more information contact: sales@malabar.com

38 Ton Universal Fixed Height Tripod Jack

Model 8882

Specifications:

Rated Capacity.....	38 tons (34.5 m. tons)
Side Load	15% of vertical load
Roll Under Height.....	64 inches (1626 mm)
Low Height	62.5 inches (1588 mm)
Hydraulic Lift	94 inches (2388 mm)
Extension Screw	18.5 inches (470 mm)
Total Extended Height	175 inches (4445 mm)
Total Extended Height with A320 Tail Adapter.....	182 inches (4620 mm)
Oil Pressure at Rated Capacity	3065 psig (216 kg/sq cm)
Safety Pop-off Valves:	
System Relief Valve set at:.....	41.8 tons (37.9 m. tons)
Thermal Relief Valve set at:	47.5 tons (43.1 m. tons)
Proof Load.....	57 tons (51.7 m. tons)
Reservoir Capacity.....	26 gallons (98.4 liters)
Hydraulic Fluid	MIL-PRF-5606 or equivalent
Maximum Towing Speed	5 mph (8 km/h)
Approximate Jack Net Weight	2000 lbs (900 kg)

Model 8882 Typical Aircraft Applications:

Nose, Wing and Tail Jack Points

A318, A319, A320, A321, B737-100 thru -900

Optional Equipment Codes:

(Specify with order)

- AP: Air Operated Hydraulic Pump
- GA: Load Gauge
- HC: Adjustable Swivel Foot with Hydraulic Caster
- LA: Ladder/platform
- TA: A320 Tail Adapter
- SPC: Special Paint Color (yellow is standard)
- 8882PK: Repair Kit

Packaging Codes & Options:

(Specify with order)

- KD: Domestic Skid – Jack Knocked Down
- ECKD: Export Crate – Jack Knocked Down (Additional Cost)

38 Ton Universal Fixed Height Tripod Jack

Model 8882

Shipping Data:

NOTE: Unless otherwise specified, Model 8882 jack is shipped on a wood skid in the knocked down condition. Refer to Malabar Tripod Jack Shipping Supplement for additional packaging information.

Packaging Code	Length inches (mm)	Width inches (mm)	Height inches (mm)	Weight lbs (kg)
KD	105 (2667)	48 (1219)	51 (1295)	2200 (998)
ECKD	107 (2718)	53 (1346)	54 (1372)	2600 (1179)