

50 Ton Auto-RetractTM Axle Jack Model 50P9AR



The Model 50P9AR Auto-Retract Axle Jack is a 50 ton capacity, two stage hydraulic jack designed primarily for use in jacking the main and/or nose landing gear of various aircraft. The jack consists of a two stage cylinder assembly, frame/reservoir assembly, valve block assembly, hand pump assembly and control console.

Model 50P9AR is built to withstand harsh environmental conditions, rugged use and to provide many years of continuous service. Our customers are guaranteed a quality product with each purchase and are assured of our continued product support whenever and wherever the need arises.

Standard features:

- Double acting auto-retract™ cylinder assembly incorporates a fluid bath for sealing surfaces to minimize corrosion and extend seal life. It also includes skydrol resistant seals and bronze upper bearings for longer service life
- Auto-retract[™] plungers remain fully retracted while jack is being towed or in storage to protect against corrosion, contaminants and accidental damage
- Single valve control for simple and easy aircraft raising, lowering and auto-retract[™]. Jack retracts to full retracted position automatically which provides for easy removal from under aircraft jack point after each operation
- Control console with all controls conveniently mounted for ease of operation
- 8" diameter heavy duty swivel casters and retractable front wheel with skydrol resistant tread. The tow handle actuated front wheel provides improved ground clearance for towing

Standard features (cont.)


- Hydraulic fuse at the cylinder assembly prevents lowering of load in the event of a fluid line failure
- Two manual hand pumps (one high pressure, low volume and one low pressure, high volume
- Oil filter cap with filtered air vent and dipstick
- Hard chrome plated cylinder and plunger bores
- All unpainted parts are plated to resist corrosion
- Skydrol resistant paint (safety yellow)
- Factory proof load @ 150% of rated capacity
- 1 year warranty
- Fully enclosed shipping container with skid

Optional features:

- Air operated hydraulic pump
- Load gauge for load indication (reads tons/psig)
- Air line lubricator (for air operated hydraulic pump)
- Rain hat (covers cylinder assembly)



50 Ton Auto-RetractTM Axle Jack Model 50P9AR

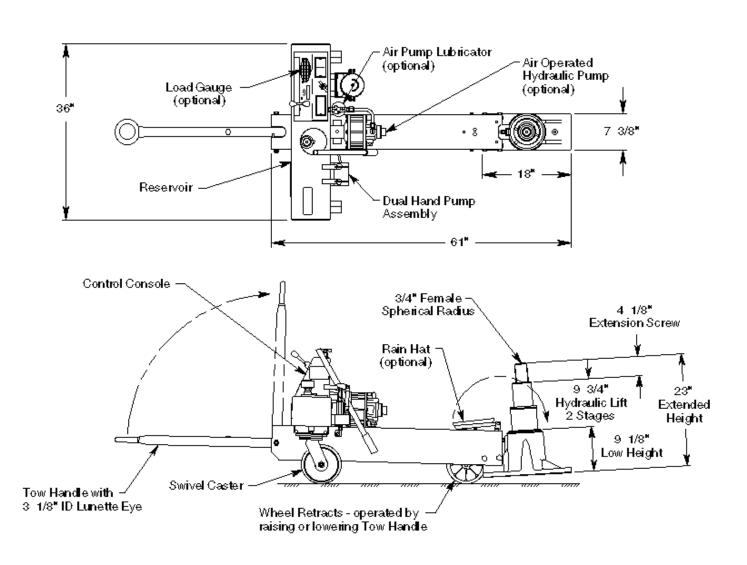



50 Ton Auto-Retract™ Axle Jack

Model 50P9AR

Specifications:

Rated Capacity	50 tons (45.4 m. tons)
Low Height:	9.13 inches (232 mm)
Hydraulic Lift	
Extension Screw	
Total Extended Height	
Base Width	7.38 inches (187 mm)
Cylinder Diameter	7.38 inches (187 mm)
Oil Pressure at Rated Capacity	6660 psig (468 kg/sq cm)
Safety Pop-off Valve set at: Proof Load	53 tons (48.1 m. tons)
Proof Load	75 tons (68.0 m. tons)
Floor Loading at Rated Capacity	830 psi (58 kg/sq cm)
Reservoir Capacity	
Hydraulic Fluid	MIL-PRF-5606 or equivalent
Maximum Towing Speed	5 mph (8 km/h)
Approximate Jack Net Weight	

Model 50P9AR Typical Aircraft Applications:			
Main Landing Gear	Nose Landing Gear		
A319, A320, A321, B717, B727, B737 B757, DC8, DC9, F100, MD80, MD90	A319, A320, A321, B727, B737-600 THRU -900, B757		

Optional Equipment Codes:

(Specify with order)

AP: Air Operated Hydraulic Pump

GA: Load Gauge

LU: Lubricator (requires air operated hydraulic pump)

RH: Rain Hat

SPC: Special Paint Color (yellow is standard)



50 Ton Auto-RetractTM Axle Jack Model 50P9AR

Jack Accessories:

(Order Separately)

50P9ARPK: Repair Kit

871420: Tire Slave Kit (to operate air operated hydraulic pump from aircraft tire)

880470: Lift Ring Kit (provides three lift points to lift jack assembly)

881700: Model 8817 Universal Axle Jack Transporter (trailer for long distance, high speed towing)

873828: Extender Kit (for B747-400ER NLG)

Shipping Data:

NOTE: Unless otherwise specified, Model 50P9AR jack is shipped on a wood skid with an enclosed cover.

Refer to Malabar Axle Jack Shipping Supplement for additional packaging information.

Length inches (mm)	Width inches (mm)	Height inches (mm)	Weight lbs (kg)
70 (1778)	45 (1143)	34 (864)	540 (245)